



LEDINPRO

# INSTALLATION INSTRUCTIONS

## SOLIFY MAX



CE RoHS

© Copyright 2023 LEDINPRO LIGHTING 2023-12.  
Subject to change without notice, Tolerance  $\pm 10\%$ .  
Horticulture lighting | Not suitable for household illumination.

LEDINPRO LIGHTING

 [www.ledinpro.com](http://www.ledinpro.com)  
 [info@ledinpro.com](mailto:info@ledinpro.com)


## BEFORE INSTALLATION

 **Important information**  
Read carefully

This guide explains how to install Solify Max. All warnings and cautions should be followed. Installation must be performed by qualified electricians in accordance with national and Local electrical and building codes.


**CONSULT QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR**  
**CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS**

### Match Label Colors

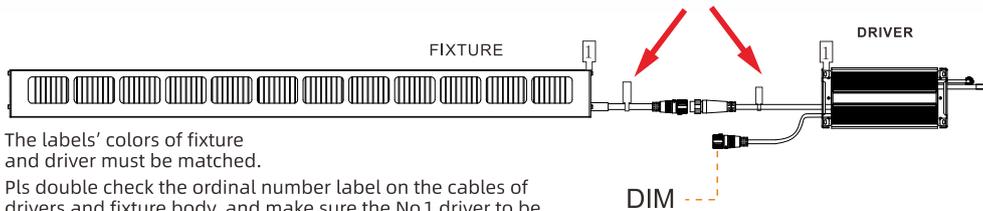

The labels' colors of fixture and driver must be matched.



Pls double check the ordinal number label on the cables of drivers and fixture body, and make sure the No.1 driver to be installed with No.1 fixture body; No.2 driver to be installed with No.2 fixture body ... No.100 driver to be installed with No.100 fixture body... and so on.



Lock the hooks securely


## INSTALLATION INSTRUCTIONS

### I. Suspension Installation with Adjustable Stainless Steel Cables

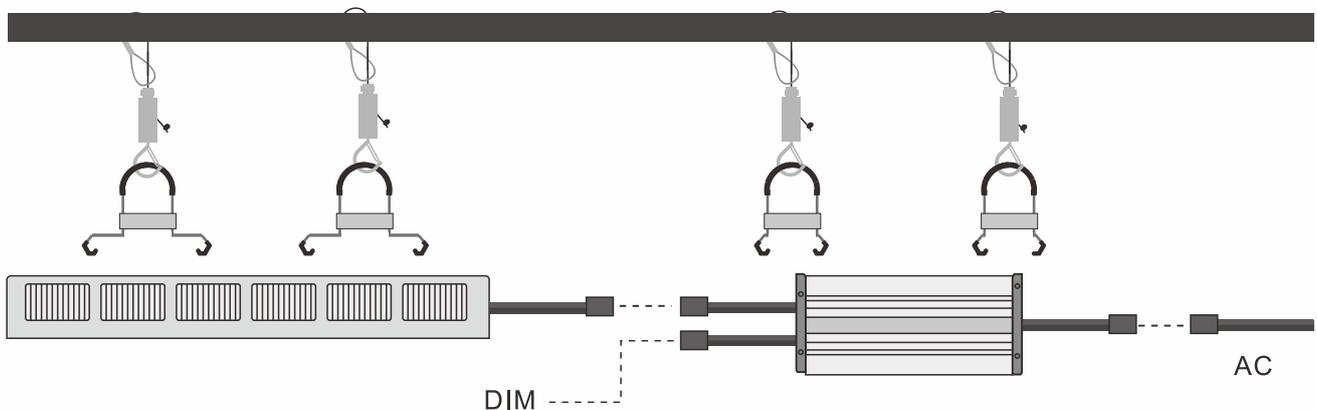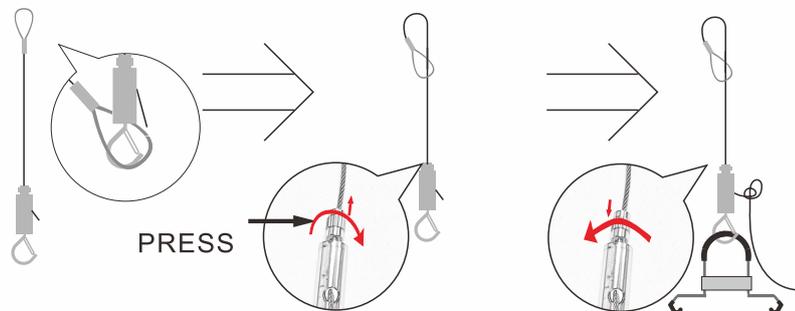


(Dimming input, if you don't connect dimming cable, pls install the end cap to make the lights waterproof.)

## II. Suspension Installation with Stainless Steel Hooks

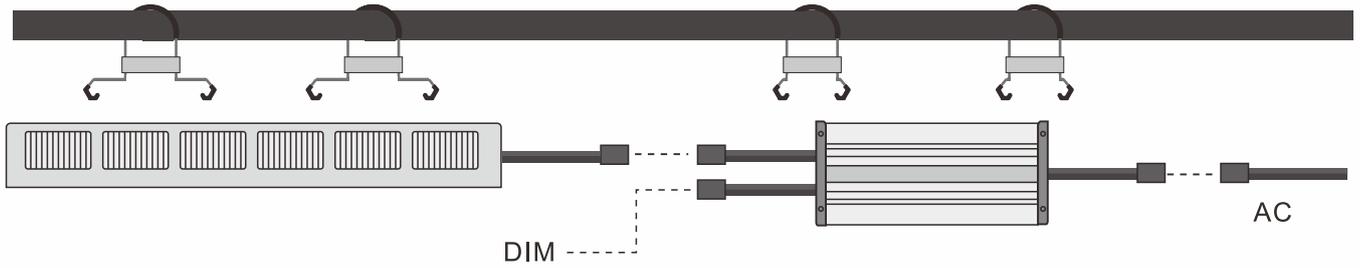

(Dimming input, if you don't connect dimming cable, pls install the end cap to make the lights waterproof.)

## ELECTRICAL INTERCONNECTIONS

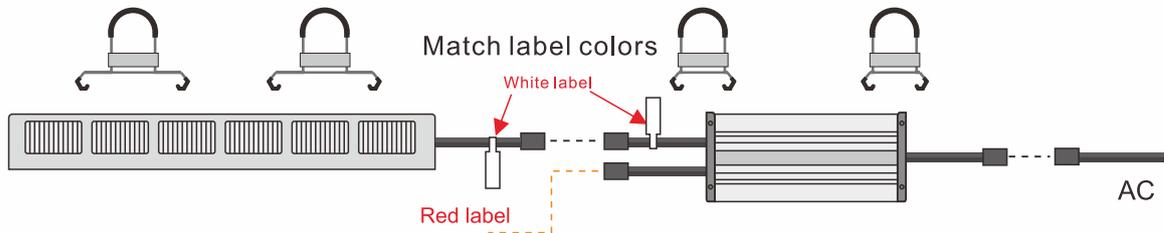

## PRODUCT PARAMETERS

	Model No.	Power	Weight	BTU
North America	446-0008	840W	24.69lb	2866.2
	446-0006	840W	24.69lb	2866.2
Europe	446-0007	840W	24.69lb	2866.2
	446-0008	840W	24.69lb	2866.2

		VOLTAGE(AC)	120V	230V	277V	400V
AMPERAGE	North America	446-0008	7.00A	/	3.03A	/
	Europe	446-0006	/	3.65A	/	/
		446-0007	/	/	/	2.1A
		446-0009	/	3.65A	/	/



### IMPORTANT TO INSTALLATION

- Disconnect the power supply before installation. Installation must be performed by qualified electricians in accordance with national and local electrical and building codes.
- Use a junction box with IP level IP66.
- Be sure that the stainless clips are installed securely to prevent the lamp from coming loose and falling.
- Please follow the Installation Instructions to connect power cable and dimming cable.
- The lamp must be oriented with the light shining downward, and not upward or to the side. Damage to the lamp fixture caused by heat
- Do not turn on the power until installation is completed.



### IMPORTANT TO LIGHTS

- Do not modify or alter the product as this will void the warranty.
- The light sources (LEDs) are not serviceable or replaceable.
- Please ensure lights work under specified voltage.
- Please ensure lights work under specified temperature range.
- Please do not exceed max interconnection quantity.