



MarsEVOL

INSTALLATION INSTRUCTIONS INSTRUCTIONS D'INSTALLATION

SOLIFY PRO



CE RoHS


BEFORE INSTALLATION

**⚠ Important information
Read carefully**

This guide explains how to install Solify Pro . All warnings and cautions should be followed. Installation must be performed by qualified electricians in accordance with national and local electrical and building codes.


**CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS.**

Match label colors

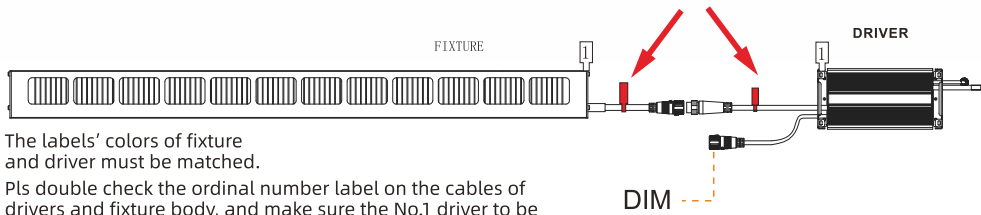

The labels' colors of fixture and driver must be matched.


Pls double check the ordinal number label on the cables of drivers and fixture body, and make sure the No.1 driver to be installed with No.1 fixture body; No.2 driver to be installed with No.2 fixture body ... No.100 driver to be installed with No.100 fixture body... and so on.




Lock the hooks securely

INSTALLATION INSTRUCTIONS

I. Suspension Installation with Adjustable Stainless Steel Cables

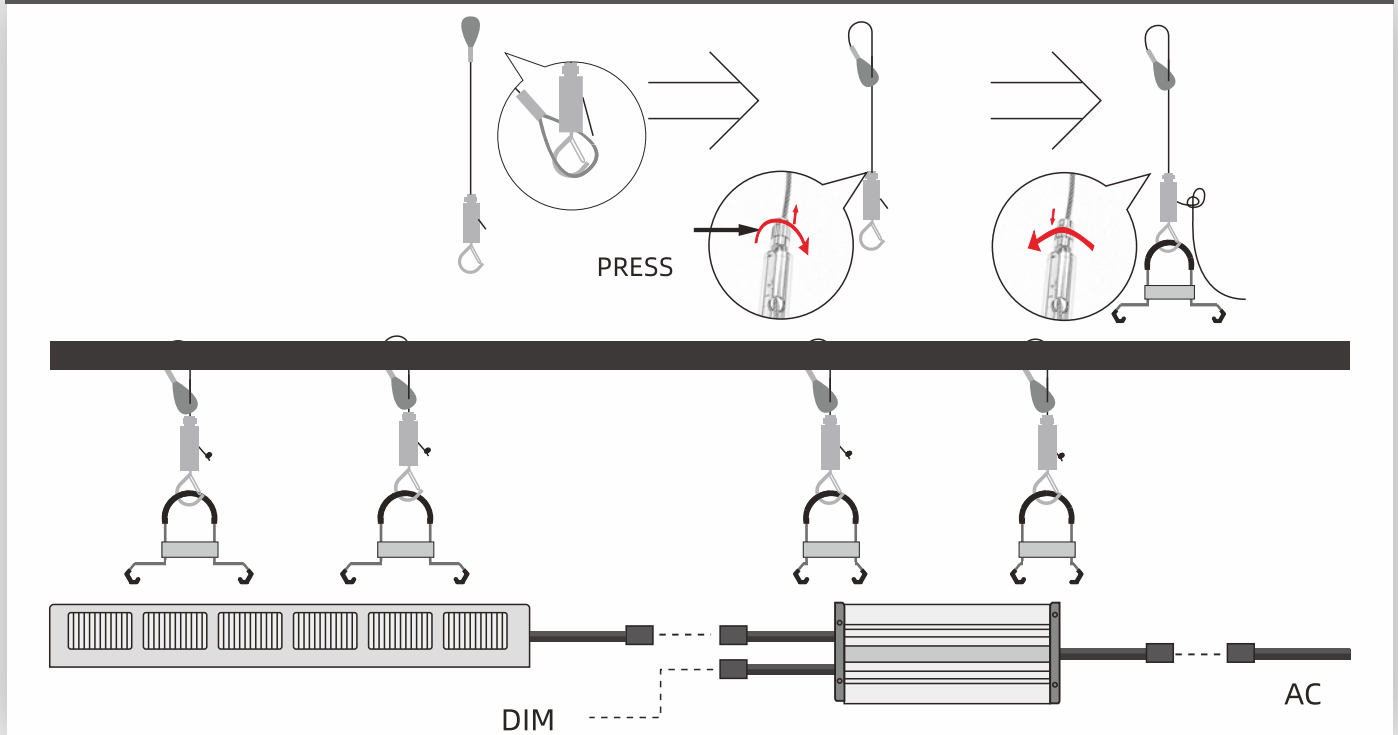


II. Suspension Installation with Stainless Steel Hooks

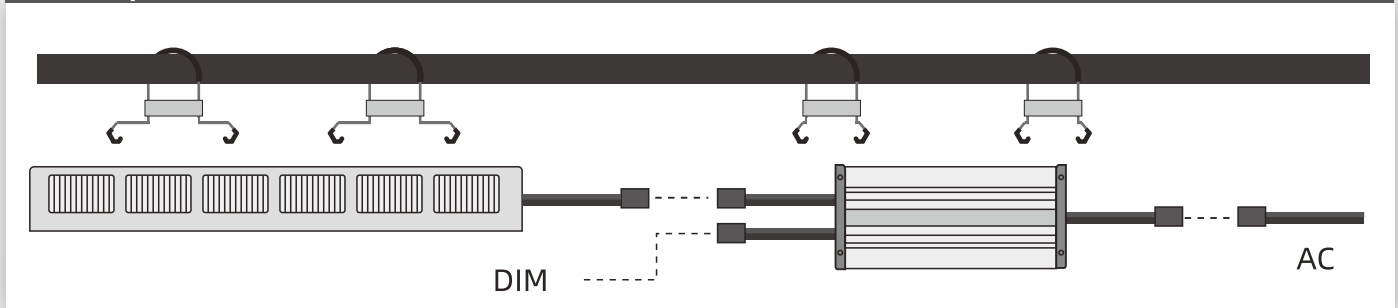


ELECTRICAL INTERCONNECTIONS

351-0003.0004.0008.0011

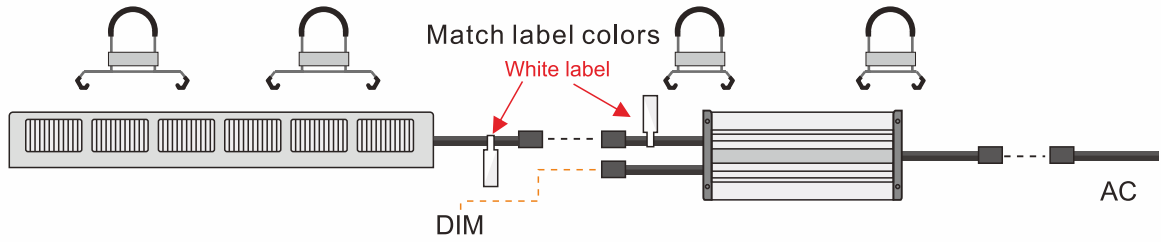


(Dimming input, if you don't connect dimming cable, pls install the end cap to make the lights waterproof.)

351-0005&0009

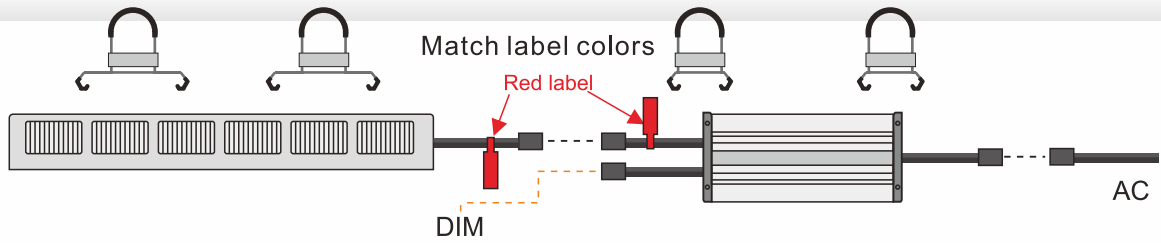

(Dimming input, if you don't connect dimming cable, pls install the end cap to make the lights waterproof.)

351-0006&0010

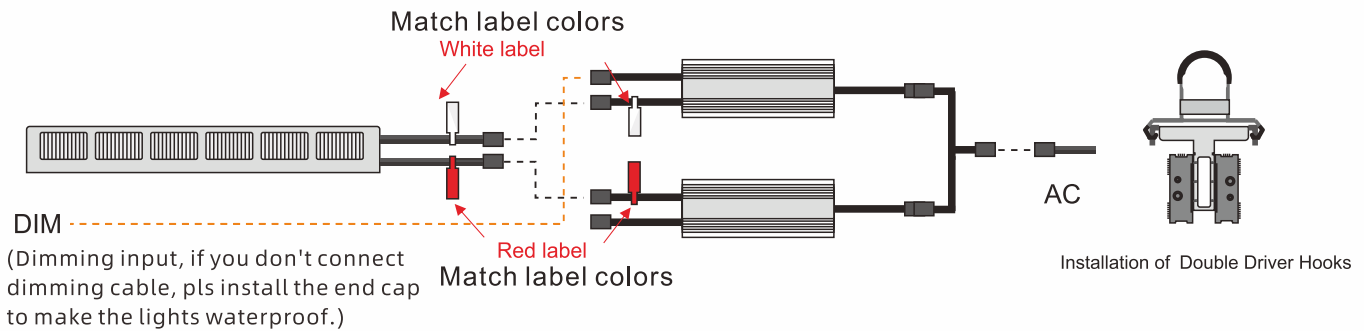

Model No.	Power	Weight	BTU
351-0003	630W	20.94lb	2149
351-0004	630W	20.94lb	2149
351-0005	625W	20.94lb	2133
351-0006	620W	22.04lb	2116
351-0008	630W	9.5kg	2149
351-0009	625W	9.5kg	2133
351-0010	620W	10kg	2116
351-0011	630W	9.5kg	2149

	VOLTAGE(AC)	120V	208V	230V	277V	348V	400V	480V
AMPERAGE	351-0003	5.25A	3.03A	2.74A	2.27A	/	/	/
	351-0004	/	/	/	2.27A	1.81A	/	1.31A
	351-0005	5.21A	3.00A	3.72A	2.26A	/	/	/
	351-0006	5.17A	2.98A	2.70A	2.24A	/	/	/
	351-0008	/	/	2.74A	/	/	/	/
	351-0009	/	/	3.72A	/	/	/	/
	351-0010	/	/	2.70A	/	/	/	/
	351-0011	/	/	/	/	/	1.58A	/



IMPORTANT TO INSTALLATION

- Disconnect the power supply before installation. Installation must be performed by qualified electricians in accordance with national and local electrical and building codes.
- Use a junction box with IP level IP66.
- Be sure that the stainless clips are installed securely to prevent the lamp from coming loose and falling.
- Please follow the Installation Instructions to connect power cable and dimming cable.
- The lamp must be oriented with the light shining downward, and not upward or to the side. Damage to the lamp fixture caused by heat
- Do not turn on the power until installation is completed.



IMPORTANT TO LIGHTS

- Do not modify or alter the product as this will void the warranty.
- The light sources (LEDs) are not serviceable or replaceable.
- Please ensure lights work under specified voltage.
- Please ensure lights work under specified temperature range.
- Please do not exceed max interconnection quantity.





MarsEVOL

LED-INNOVATION-PROFESSION

Copyright Reserved. Without the written permission of the copyright owner, duplicate this manual or part of the manual is prohibited.
Information provided here is not apart of any offer or contract. Our company believes the content is accurate and reliable.
Releasing this information is not meant to transfer or imply any patent certification or other industry or knowledge and intellectual property.

©Copyright 2022 MarsEVOL LIGHTING 2022-01
Subject to change without notice, Tolerance $\pm 10\%$
Horticulture lighting | Not suitable for household illumination.

 www.marsevol.com
 info@marsevol.com